


DESCRIPTION

This device provides the ability to route 16 analog audio/video input signals to a channel.

FEATURES

- Memory back-up function helps to remember the last status while it is turned off and there are monitoring ports for a display.
- A rear panel RS-232C control port provides connection of the Selector Switcher to a control system.

PANEL DRAWING

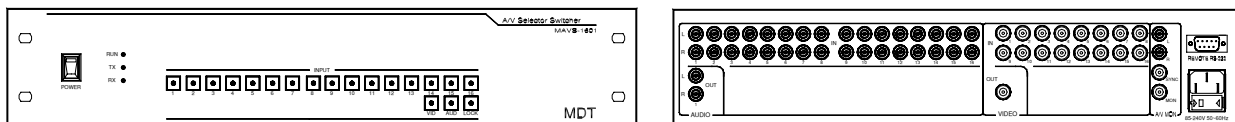

SPECIFICATIONS

Model	MMS-AV1601 : 16 Input 1 Output 1 Monitoring Port	
Audio Part	Input/Output Level	+14 dBm Maximum
	Input/Output Impedance	Stereo Unbalanced 600ohm , RCA.
	S/N Ratio	Less than 70dB
	Crosstalk	Less than 80dB
	Bandwidth	100MHz -3 dB
	Frequency Response	±0.1dB (20Hz ~ 20kHz)
Video Part	Input/Output Impedance	NTSC Composite Video BNC 1Vp-p 75ohm
	S/N Ratio	Less than 65dB
	Crosstalk	Less than 60dB
	Bandwidth	100 MHz -3 dB
	Frequency Response	±0.1dB (100kHz ~ 5MHz)
	Differential Phase	1°
	Differential Gain	1%
Control Part	Sync Input	Composite or BB, 75ohm, 1Vp-p, BNC
	CPU	89C55 WD
Case	Control terminal	RS-232C
	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 30Watt
	Type	19" Rack Type
Dimensions	483(W) * 89(H) * 300(D) mm	