


DESCRIPTION

This is a main control unit can send commands simultaneously from both its RS-232 port and 422 to control small system.

FEATURES

- Besides RS-232 port and 422, there are input/output ports available and suit for controlling small size system.
- It controls the operating program or key-pad by connecting various devices.

PANEL DRAWING

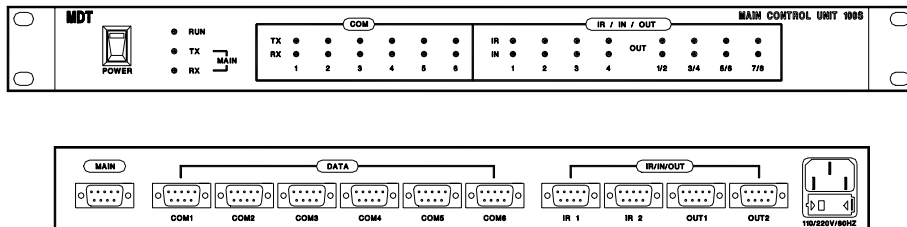

SPECIFICATIONS

Model	MMCU-100S	
Specification	Main(Key-Pad, Computer) Com. Port	1 Port (RS-232C)
	Local Control Com. Port	6 Port (RS-232C/422)
	IR Port / Serial	4 Port
	Input Port	4 Port
	Output Port	8 Port
	CPU	89C52
	RAM	32Kbyte
	Control terminal	16C554 (RS-232C/422)
Case	Internal voltage	+5V
	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz , Less than 30Watt
	Type	19" Rack Type
	Dimensions	483(W) * 44.5(H) * 300(D) mm