


DESCRIPTION

This device provides the ability to route 4 analog audio/video input signals to a channel.

FEATURES

- Memory back-up function helps to remember the last status while it is turned off and there are monitoring ports for a display.
- A rear panel RS-232C control port provides connection of the Selector Switcher to a control system.
- The front display panel enables easy monitoring of input and output modes.

PANEL DRAWING

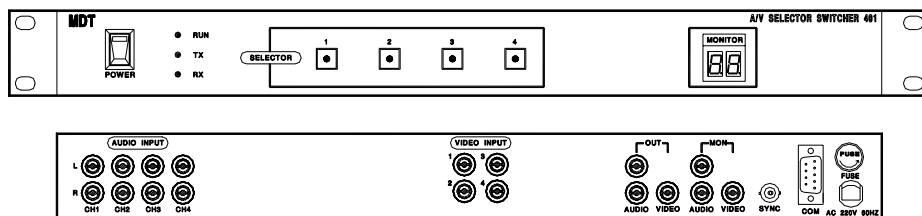

SPECIFICATIONS

Model	MAVS-401 : 4 Input 1 Output 1 Monitoring Port	
Audio Part	Input/Output Impedance	Stereo Unbalanced 600ohm , RCA.
	S/N Ratio	Less than 80dB
	Crosstalk	Less than 80dB
	Frequency Response	±0.1dB (20Hz ~ 20kHz)
Video Part	Input/Output Impedance	NTSC Composite Video RCA 1Vp-p 75ohm
	S/N Ratio	Less than 80dB
	Crosstalk	Less than 60dB
	Frequency Response	±0.3dB (100kHz ~ 5MHz)
	Differential Phase	1°
	Differential Gain	1%
	Sync Input	Composite or BB, 75ohm, 1Vp-p, BNC
Control Part	CPU	89C55 WD
	Control terminal	RS-232C
Case	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 20Watt
	Type	19" Rack Type
	Dimensions	483(W) * 44.5(H) * 300(D) mm