

DESCRIPTION


This high-end device enables to route 48 A/V input signals to 48 A/V appropriate outputs by distributing and switching.

FEATURES


- Enable to control input/output by front control key(Video Matrix). A rear panel RS-232C control port provides remote control function.
- Memory back-up function helps to remember the last status while it is turned off.
- The front LCD panel enables easy monitoring of input and output modes.

PANEL DRAWING

AUDIO MATRIX SWITCHER 4848

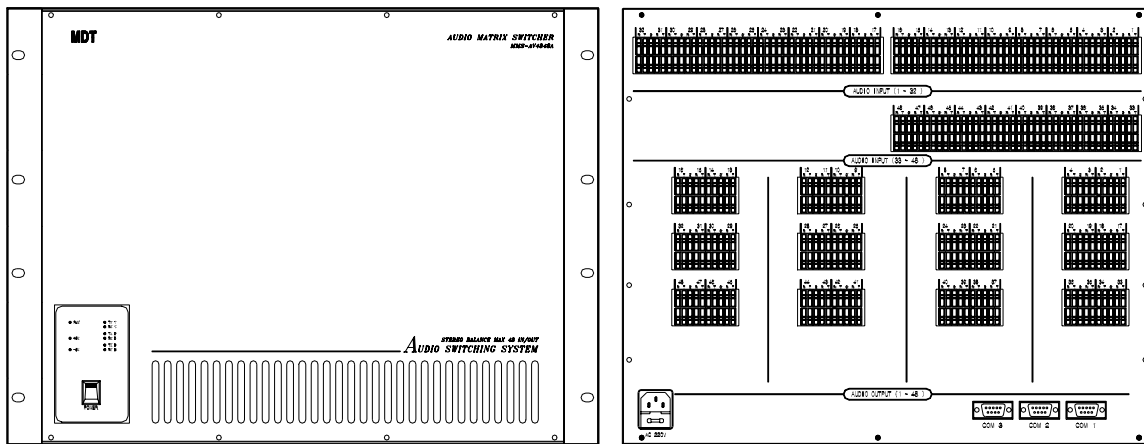

VIDEO MATRIX SWITCHER 4848

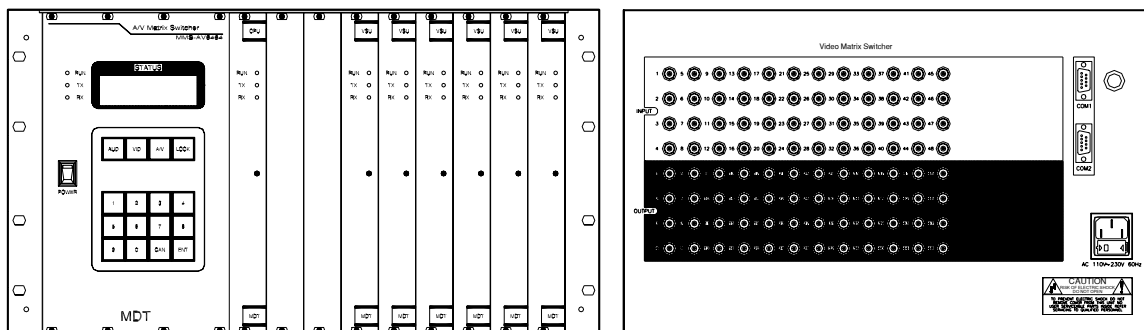

SPECIFICATIONS

Model	MMS-AV4848 (48 Input 48 Output) : Audio Shelf – 1EA / Video Shelf – 1EA	
Audio Part	Connector	WAGE / TIP,RING,GND / Stereo
	Input/Output Impedance	600ohm Balanced, Stereo
	Bandwidth	100kHz -3dB
	Output Gain	0dB
	S/N Ratio	Less than 80dB
	Crosstalk	Less than 80dB
	DC Power	+5V, -5V, +15V, -15V
Video Part	Input/Output Impedance	NTSC Composite Video BNC 1Vp-p 75ohm
	S/N Ratio	Less than 80dB
	Crosstalk	Less than 60dB
	Bandwidth	300MHz -3 dB
	Frequency Response	±0.1dB (100kHz ~ 5MHz)
	Differential Phase	1°
	Differential Gain	1%
	Sync Input	Composite or BB, 75ohm, 1Vp-p, BNC
Control Part	Control terminal	RS-232C
Case	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Audio : Less than 80Watt , Video : Less than 60Watt
	Type	19" Rack Type
	Dimensions	Audio : 483(W) * 356(H) * 320(D) mm Video : 483(W) * 267(H) * 320(D) mm