


## DESCRIPTION

This device enables to route 6 audio/video input signals to 6 audio/video output.

## FEATURES

- Enable to control input/output by front control key. A rear panel RS-232C control port provides remote control function.
- Memory back-up function helps to memorize the last status while it is turned off, PGM/CALL function enables to save and operate A/V status.
- Monitoring ports are available to monitor output mode when input modes are selected.
- The front display panel enables easy monitoring of input and output modes.

## PANEL DRAWING

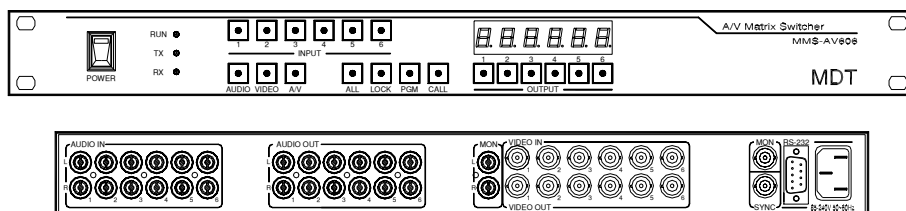

## SPECIFICATIONS

Model	MMS-AV606 : 6 Input 6 Output 1 Monitoring Port	
Audio Part	Input/Output Level	+14 dBm Maximum
	Input/Output Impedance	Stereo Unbalanced 600ohm , RCA.
	S/N Ratio	Less than 70dB
	Crosstalk	Less than 80dB
	Bandwidth	100 MHz -3 dB
	Frequency Response	±0.1dB (20Hz ~ 20kHz)
Video Part	Input/Output Impedance	NTSC Composite Video BNC 1Vp-p 75ohm
	S/N Ratio	Less than 65dB
	Crosstalk	Less than 60dB
	Bandwidth	100 MHz -3 dB
	Frequency Response	±0.3dB (100kHz ~ 5MHz)
	Differential Phase	1°
	Differential Gain	1%
Control Part	Sync Input	Composite or BB, 75ohm, 1Vp-p, BNC
	CPU	89C55 WD
Case	Control terminal	RS-232C
	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 25Watt
	Type	19" Rack Type
Dimensions	483(W) * 44.5(H) * 300(D) mm	