


DESCRIPTION

This RGB matrix switcher allows maximum 8 R.G.B.H.V input signals to be switched to eight compatible devices.

FEATURES

- Easy operation from front panel. A rear panel RS-232C control port provides connection of the Matrix Switcher to a control system.
- The front LCD panel enables easy view of inputs and outputs.
- Memory Back-up function helps to remember the last status while it is turned off.

PANEL DRAWING

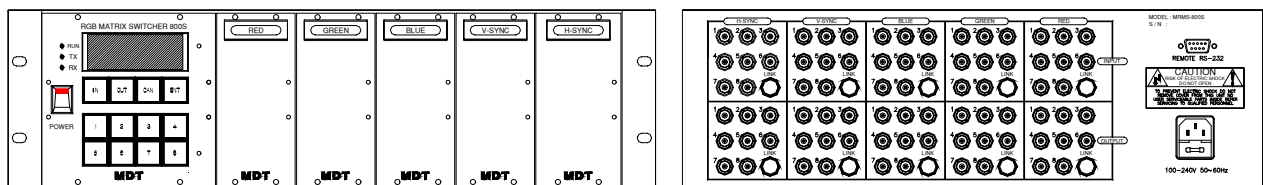

SPECIFICATIONS

Model	MRMS-800S / 8 Input 8 Output	
Features	Main Mode & 8 Recall Mode Operation , Data Backup	
	Fully Buffered Input/Output	
	All Outputs Cable of Driving 75	
	Status display L.C.D (16 X 2)	
Video/Sync	Connectors	BNC Female (R.G.B.H.V)
	In/Out Signal	75 / 1.2Vp-p
	Bandwidth	325MHz
	Single Channel Crosstalk	70dB(20Hz ~ 300MHz)
	S/N	Less than 70dB
Remote Control	Format	RS-232/Serial/Async/TX,RX,GND Only
	Connectors	D-sub9p,Female Com1
	Data Protocol	Baudrate-9600bps/Data-8bit/Stop-1Bit/Parity-Non
	Com1(Control Port)	RX DATA – switching & recall select & recall in/out edit & status require TX DATA – switching status of present, recall 8 memory
General	Switching Point of Matrix Configuration	
	R.G.B.H.V 08X08 Switcher. . .	
	External interface RS-232(9600bps, 1port)	
	Power supply AC 85 ~ 240V 50 ~ 60Hz 20W Max	
	OP. DC power	+5V, -5V
	Operation temperature	0 ~ 40
	Weight	7.3Kg
	19" Rack mountable, plug in type switching boards	
Dimensions	480(W) * 133(H) * 267(D) mm	