


DESCRIPTION

Video Matrix Switcher (MMS-V256C) enables to receive 256 video signals and to distribute & route 64 video outputs.

FEATURES

- It composed 4 set of MMS-V6464C and used 256 by 64.
- Each video level can be adjustable. There's Sync input port for smooth switching.
- Built-in RS-232C(422) Port enables to control by remote as well as keyboard and control PRG.
- Front Control Panel (optional) helps easy operation without remote controller.

PANEL DRAWING

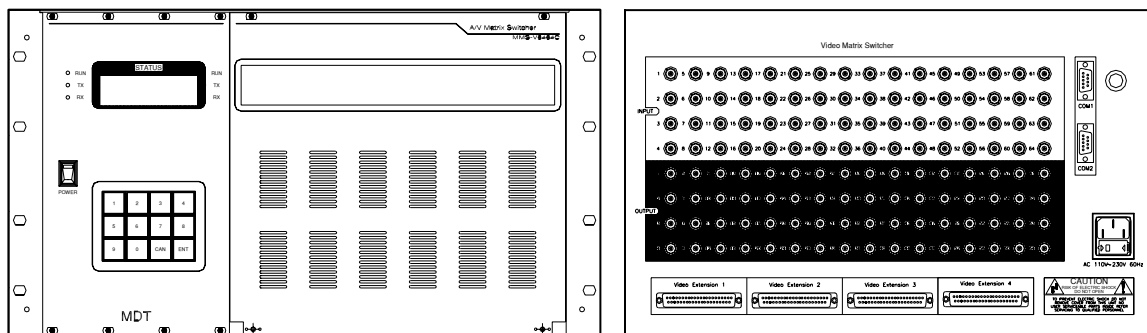

SPECIFICATIONS

Model	MMS-V256C (256 Input 64 Output)	
Video Part	Video Input	NTSC Composite Video, 1Vp-p (75)
	Video Output	NTSC Composite Video, 1Vp-p (75)
	Input/Output Connector	BNC
	Communication port	RS-232C(RS-422) 2 Port
	Bay composition	MMS-V6464C 4SET Composition
Case	Rated Power input	AC 85 – 240V 50 - 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 80W
	Type	19" Rack Type
	Dimensions	483(W) * 267(H) * 320(D) mm X 4 SET