


## DESCRIPTION

This is a one input, sixteen output R.G.B.H.V distribution amplifier.

## FEATURES

- It distributes each out to different RGB display devices such as projector, RGB SW etc..
- Easy power operation with front on/off switch and a rear D-SUB connector.

## PANEL DRAWING

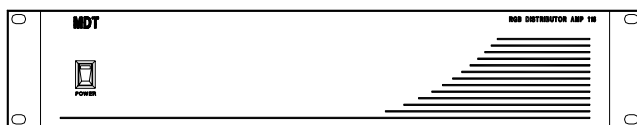

## SPECIFICATIONS

Model	MRD-116	
Specification	Input Port	1 Input (R.G.B.H.V)
	Output Port	16 Output (R.G.B.H.V)
	Input/Output Connector	D-SUB 15Pin Connector
	Input/Output Level	3 Signal 1.2Vp-p. MAX HD,VD - TTL LEVEL
	Input/Output Impedance	75 Ohm $\pm$ 1%
	Bandwidth	300MHz
Case	Rated Power input	AC 220V 60Hz $\pm$ 10% , Less than 20Watt
	Operating temperature	0 ~ 40
	Type	19" Rack Type
	Dimensions	483(W) * 89(H) * 300(D) mm