


DESCRIPTION

It allows maximum 32 R.G.B.H.V input signals with R.G.B.H.V to be switched to 32 compatible devices without crosstalk or signal noise.

FEATURES

- Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear BNC connector makes operation easy.

PANEL DRAWING

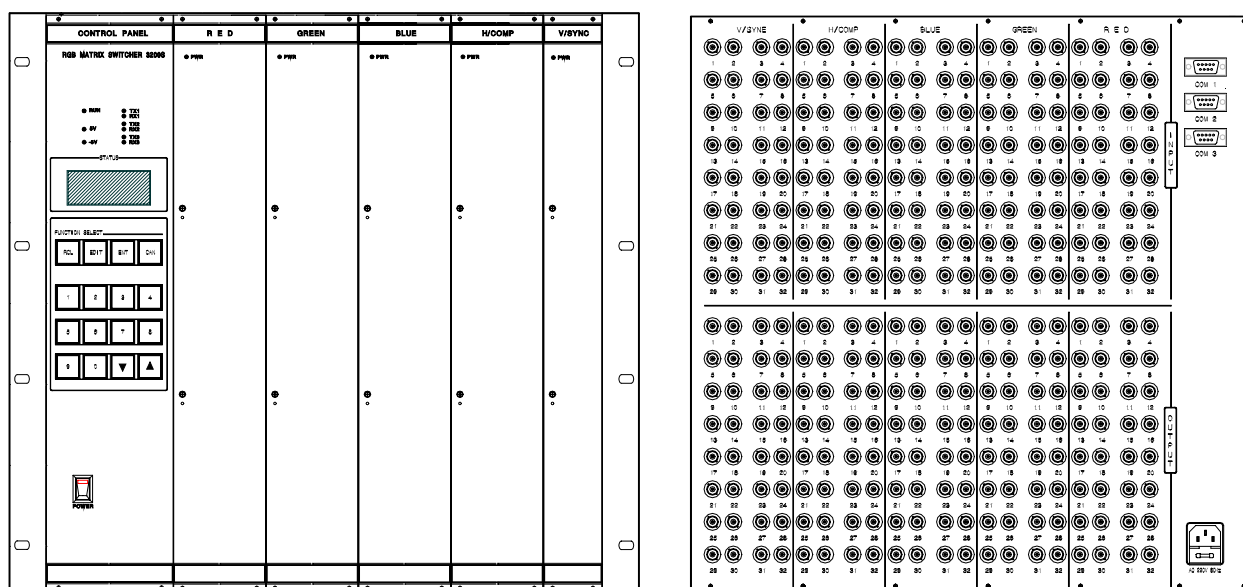

SPECIFICATIONS

Model	MRMS-3200S / 32 Input 32 Output	
Features	Main Mode & 8 Recall Mode Operation , Data Backup	
	Fully Buffered Input/Output	
	All Outputs Cable of Driving 75	
	Status display L.C.D	
Video	Connectors	BNC Female (R.G.B.H.V)
	In/Out Signal	75 / 1.2Vp-p
	Bandwidth	230MHz
	Single Channel Crosstalk	70dB(20Hz ~ 300MHz)
	S/N	Less than 70dB
Remote Control	Format	RS-232/Serial/Async/TX,RX,GND Only
	Connectors	D-sub9p,Female Com1,Com2,Com3
	Data Protocol	Baudrate-9600bps/Data-8bit/Stop-1Bit/Parity-Non

SPECIFICATIONS

Model	MRMS-3200S / 32 Input 32 Output	
Remote Control	Com1, Com2 (Control Port)	RX DATA – switching & recall select & recall in/out edit & status require
		TX DATA – switching status of present
	Com3 (Com1, Com2 Data Pass. Port)	RX DATA – pass to Com1, Com2
General		TX DATA – pass from Com1, Com2
	Switching Point of Matrix Configuration	
	R.G.B.H.V 32X32 Switcher. . .	
	External interface RS-232(9600bps, 3port)	
	Power supply AC 220V, 60Hz, 40W Max	
	OP. DC power	+5V, -5V
	Operation temperature	0 ~ 40
	Weight	12Kg
	19" Rack mountable, plug in type switching boards	
Dimensions	483(W) * 445(H) * 325(D) mm	