


## DESCRIPTION

It allows maximum 4 R.G.B.H.V input signals with R.G.B.H.V to be switched to four compatible devices without crosstalk or signal noise.

## FEATURES

- Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear BNC connector makes operation easy.

## PANEL DRAWING

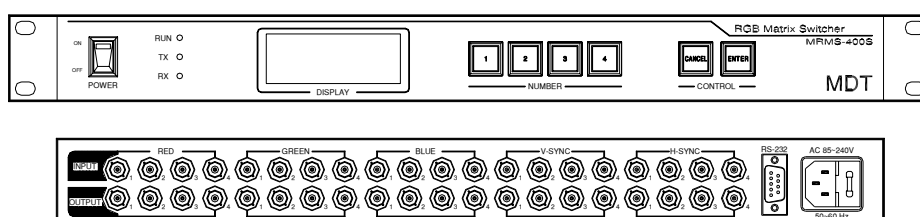

## SPECIFICATIONS

Model	MRMS-400S / 4 Input 4 Output	
Specification	Input Port	4 Port (R.G.B.H.V)
	Output Port	4 Port (R.G.B.H.V)
	Input/Output Connector	BNC Female (R.G.B.H.V)
	Input Level	Analog RGB Signal 1.2Vp-p. MAX HD, VD - TTL LEVEL
	Output Level	Analog RGB Signal 1.2Vp-p. MAX HD, VD - TTL LEVEL
	Input/Output Impedance	75Ohm ± 1%
	Crosstalk	70dB(20Hz ~ 300MHz)
	S/N	Less than 70dB
	Bandwidth	600MHz
Control Part	CPU	Micro Processor 89C52
	Control terminal	RS-232C 1Port
Case	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 20Watt
	Type	19" Rack Type
	Dimensions	483(W) * 44.5(H) * 300(D) mm