


DESCRIPTION

It allows 48 R.G.B.H.V input signals with R.G.B.H.V to be switched to one compatible display device.

FEATURES

- Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear BNC connector makes operation easy.
- 48 selector switches with lamps which allow to control individually.

PANEL DRAWING

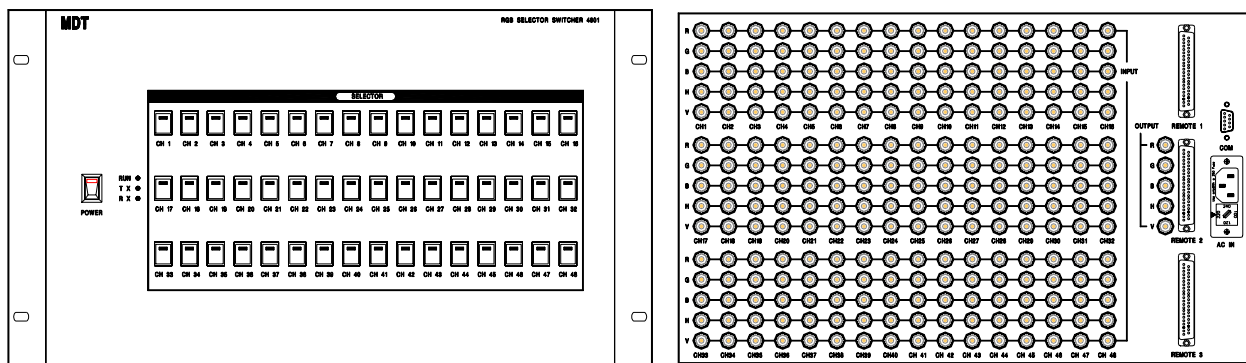

SPECIFICATIONS

Model	MRMS-4801	
Specification	Input Port	48 Port (R.G.B.H.V)
	Output Port	1 Port (R.G.B.H.V)
	Input/Output Connector	BNC Connector
	Input Level	Analog RGB Signal 1.2Vp-p. MAX HD,VD - TTL LEVEL
	Output Level	Analog RGB Signal 1.2Vp-p. MAX HD,VD - TTL LEVEL
	Input/Output Impedance	75 ± 1%
Control Part	CPU	Micro Processor 89C52
	Control terminal	RS-232C 1Port
	Lamp Out	+12V
	Remote In	DRY CONNECT IN
Case	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 30Watt
	Type	19" Rack Type
	Dimensions	483(W) * 267(H) * 300(D) mm