


## DESCRIPTION

Audio Distribution Amplifier takes one analog audio signal and then amplifies, split it to 8 audio analog signals.

## FEATURES

- Distinctive quality provides low loss and best clarity.
- Audio gain generators enable to regulate the signal for leveling.

## PANEL DRAWING

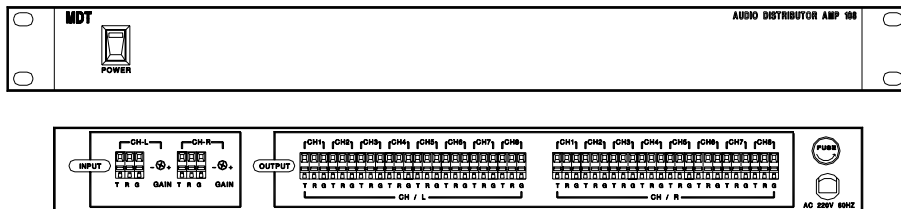

## SPECIFICATIONS

Model	MAD-108 : 1 Analog Audio Input, 8 Output	
Audio Part	Max Level	21dBm MAX
	Input/Output Impedance	600ohm Balanced, Stereo
	S/N Ratio	Less than 83dB
	Crosstalk	Less than 80dB
	Frequency Response	±0.1dB ( 20Hz ~ 20kHz)
	Input/Output Connector	236 WAGO Connector
Case	Rated Power input	AC 220V 60Hz ±10%
	Operating temperature	0 ~ 40
	Power consumption	Less than 10Watt
	Type	19" Rack Type
	Dimensions	483(W) * 44.5(H) * 300(D) mm