


DESCRIPTION

Audio Distribution Amplifier takes one analog audio signal and then amplifies, split it to 6 audio analog signals.

FEATURES

- Accepts an analog audio signal by simple operation and distributes 3 analog audio signals with 2 channels.
- Audio gain generators enable to regulate the signal for leveling.

PANEL DRAWING

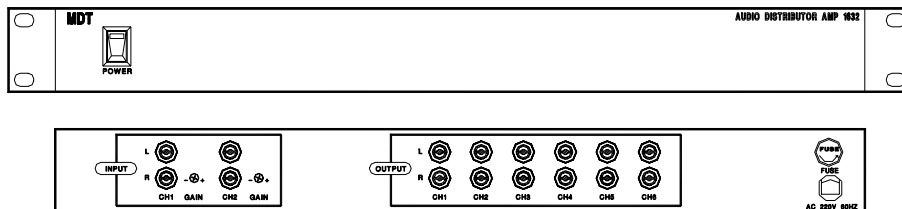

SPECIFICATIONS

Model	MAD-1632 : 1 Analog Audio Input, 6 Output (or 1 In 3 Out 2 Channel)	
Specification	Input/Output Impedance	600ohm Unbalanced, Stereo
	Gain	-11dB ~ +11dB
	S/N Ratio	Less than 83dB
	Crosstalk	Less than 80dB
	Frequency Response	±0.1dB (20Hz ~ 20kHz)
Case	Rated Power input	AC 220V 60Hz ±10%
	Operating temperature	0 ~ 40
	Power consumption	Less than 10Watt
	Type	19" Rack Type
	Dimensions	483(W) * 44.5(H) * 300(D) mm