


DESCRIPTION

This audio distribution amplifier enables one input, three output 2 channel with one card , so it could be used maximum one input three output 16 channel.

FEATURES

- This is card type distribution amplifier for broadcasting audio use. It is designed to view power supply status of the equipment from the front panel.
- Audio gain generators enable to regulate the signal for leveling.

PANEL DRAWING

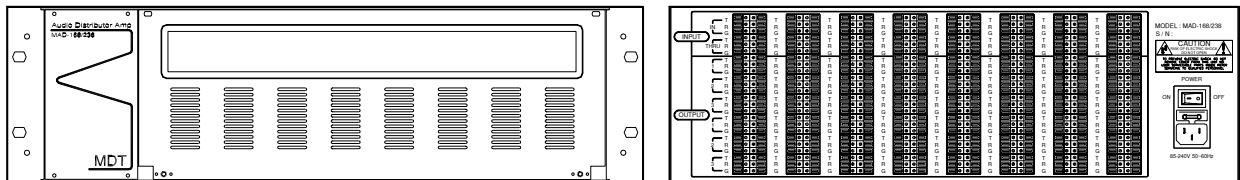

SPECIFICATIONS

Model	MAD-238 : 1 Analog Audio Input, 3 Output, 2 Channel, Card 8 EA	
Audio Part	Max Level	21dBm MAX
	Input/Output Impedance	600ohm Balanced, Stereo
	S/N Ratio	Less than 83dB
	Crosstalk	Less than 80dB
	Frequency Response	±0.1dB (20Hz ~ 20kHz)
	Input/Output Connector	WAGO Connector
Case	Rated Power input	AC 85 ~ 240V 50 ~ 60Hz
	Operating temperature	0 ~ 40
	Power consumption	Less than 20Watt
	Type	19" Rack Type
	Dimensions	483(W) * 133.5(H) * 300(D) mm