


## DESCRIPTION

Video Distribution Amplifier takes one analog video signal and then amplifies, split it to 6 video analog signals.

## FEATURES

- It could be used one input 3 output 2 channel by simple operation.
- Video gain generators enable to regulate the signal for leveling.

## PANEL DRAWING

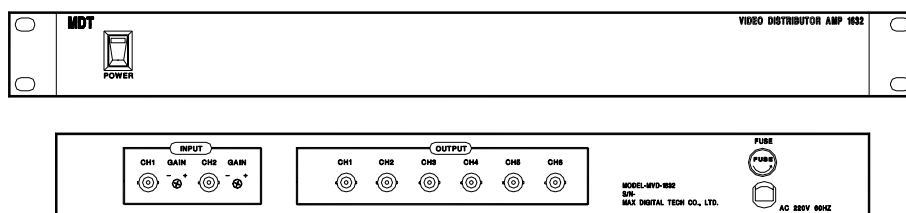

## SPECIFICATIONS

<b>Model</b>	MVD-1632 : 1 Analog Video Input, 6 Output ( or 1 In 3 Out 2 Channel)	
<b>Video Part</b>	<b>Input/Output Impedance</b>	NTSC Composite Video BNC 1Vp-p 75ohm
	<b>S/N Ratio</b>	Less than 65dB
	<b>Crosstalk</b>	Less than 60dB
	<b>Frequency Response</b>	±0.1dB (100kHz ~ 5MHz)
	<b>Gain</b>	45 ~ 185 IRE
<b>Case</b>	<b>Rated Power input</b>	AC 220V 60Hz ±10%
	<b>Operating temperature</b>	0 ~ 40
	<b>Power consumption</b>	Less than 10Watt
	<b>Type</b>	19" Rack Type
	<b>Dimensions</b>	483(W) * 44.5(H) * 300(D) mm